

DESCRIPTION

This is a high radiance InGaAs IR LED optimized for fiber optic applications requiring high power and a fast response time.

FEATURES

- ☐ Internal lensing for efficient fiber coupling
- ☐ High Electrical Bandwidth/Fast response time
- ☐ High Reliability
- ☐ Hermetic Package
- ☐ 6 Degree Half angle of light emission

ABSOLUTE MAXIMUM RATINGS

- ☐ Storage temperature..... -65°C to +125°C
- ☐ Case operating temperature -40°C to +85°C
- ☐ Lead solder temperature.... 260°C, 10 seconds
- ☐ Continuous forward current..... 100 mA
- ☐ Reverse Voltage..... 1 Volt


OUTLINE DIMENSIONS

Tolerances are +/-0.005 inches, except as noted

Pinout

1. Anode
2. Cathode

The case is electrically isolated from the pins.

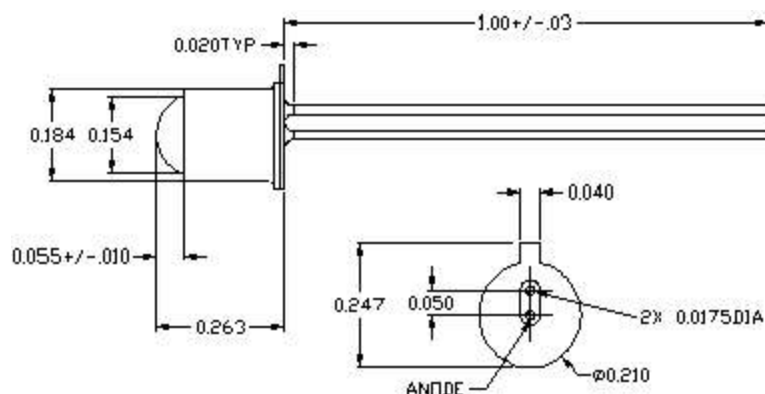

ELECTRO-OPTICAL CHARACTERISTICS (Case T = 25°C)

PARAMETER	TEST CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Forward Voltage	If = 100 mA	V _f		1.3	2.25	Volts
Reverse Voltage	I _r = 10 μA	BVR	1.0			Volts
Half Angle at Half Power		θ _{1/2}		2	6	DEG
Capacitance	V _r = 0 V, f = 1 MHz	C		70		pF
Total Optical Power	If = 100 mA	P _{out}	0.3	0.8		mW
Response Time	10%-90%, 1V Prebias If = 100 mA	t _r		4	12	nsec
		t _f		6	12	nsec
Peak Wavelength	If = 100 mA	λ _p	1280	1310	1350	nm
Spectral Bandwidth	If = 100 mA	Δλ		145		nm
Electrical Bandwidth	If = 100 mA	BWE		85		MHz